




+46-90-3493310  
[www.pipeguard.se](http://www.pipeguard.se)  
[info@pipeguard.se](mailto:info@pipeguard.se)

## mt703



2-channel level guard  
 Industrial encapsulation IP67/IP68  
 Width: 120, depth: 95, height: 65  
 Mounted on level surface with screw

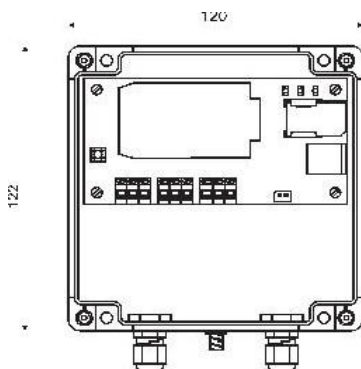

## Specification

### I/O

Alarm input  
 Temperature  
 Analogue inputs  
 Led indications

2 digital normally open with possibility to pulse counting  
 2 sensor (connected to the analogue inputs)  
 2 Analogue 10 bit  
 3

### Measure range

Digital inputs  
 Analogue inputs

Normally open alternative pulse counting max. 30 Hz with minimum pulse length 16 ms.  
 0-3.3 Volt

### Alarm transfer

Clock  
 Alarm carrier

Integrated  
 GSM/GPRS integrated in module. SMA connector

### Power supply

Voltage  
 Current


4,5 Volt  
 Battery pack.  
 Alkaline 16 Ah / 5 years  
 (Option high capacity alkaline 32 Ah / 10 years)

### Environment

IP67 (IP68 as option)  
 -20 to +50 degrees

## Programming

The unit is programmed with USB connection to PC. Very flexible programming with possibilities to set time, SMS and GPRS receivers, triggers on external inputs and many more options.

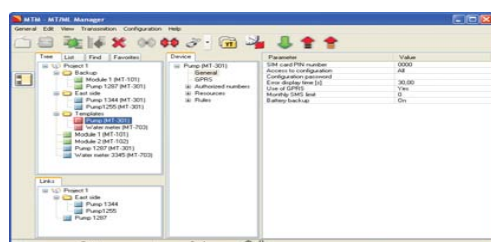

## Order information

Article	Article number
mt703	mt703
Battery pack	mt703-std batt
	mt703-high c. alkaline

PG Monitoring System AB  
 Glimmervägen 7E  
 907 40 Umeå  
 Telephone: 090-3493310  
 Telefax: 090-3493319

